### Statement™

### **KOHLER** Faucets

# Single-function iconic 1.75 gpm handshower K-26286-G

#### **Features**

- Single-function handshower delivers a full, consistent spray, regardless of water pressure.
- Infinity provides three spray experiences in one: strongrinsing (top), massaging (middle), and broad coverage (lower).
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Optimized sprayface for maximum performance.
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 45 psi (3.1 bar).
- G 1/2 connection.

#### Material

- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

- Requires shower hose (sold separately).
- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

#### **Water Conservation & Rebates**

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

#### **Recommended Products/Accessories**

K-9514 60" Shower Hose

K-8593 72" Shower Hose

K-26309 Wall-mount handshower holder

K-26310 Wall-mount handshower holder with supply elbow and check valve

K-26312 32-1/8" slidebar

K-26313 40" slidebar

K-26314 31-1/2" slidebar with integrated water supply

K-23723 Faucet cleaner





#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color Codo Deceriation


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass



## **KOHLER**, Faucets

# Single-function iconic 1.75 gpm handshower K-26286-G

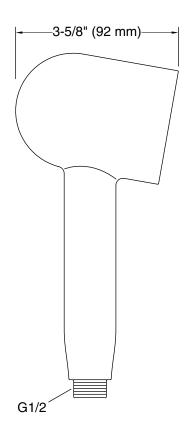

### **Technical Information**


All product dimensions are nominal.

#### **Handshower:**

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

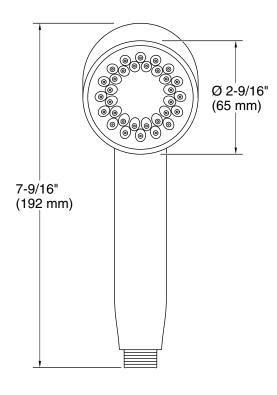

#### **Notes**

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

