

# Location:



## S-9602-PLR, S-9602-PLR-TRM, S9602PLRTRMTC Tub/Shower System or Trim Specification Submittal


Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> <li>Origins Tub/Shower System or Trim</li> <li>Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9602-PLR)</li> <li>Adjustable stop screw to limit handle turn (included with S-9602-PLR)</li> <li>Integral diverter control</li> <li>Metal lever handle</li> <li>1 mode showerhead with easy to clean nozzles</li> <li>5-1/4" non-diverter tub spout</li> <li>Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9602PLRTRMTC)</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> <b>L1</b> Less showerhead</li> <li><input type="checkbox"/> <b>L4</b> Less head, arm and flange</li> <li><input type="checkbox"/> <b>L6</b> Less tub spout</li> <li><input type="checkbox"/> <b>L7</b> Less handle</li> <li><input type="checkbox"/> <b>STN</b> Satin Nickel finish</li> <li><input type="checkbox"/> <b>B</b> Brass escutcheon (chrome only)</li> <li><input type="checkbox"/> <b>X</b> Integral service stops - allows water shut-off at valve for service</li> </ul> <p><b>Note:</b> Append appropriate suffix to model number.</p>
Model Numbers	Compliance
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>S-9602-PLR</b> Tub/Shower System with integral diverter control &amp; Temptrol Pressure Balancing Tub/Shower Valve</li> <li><input type="checkbox"/> <b>S-9602-PLR-TRM</b> Tub/Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately</li> <li><input type="checkbox"/> <b>S9602PLRTRMTC</b> Tub/Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>	<ul style="list-style-type: none"> <li>ASME A112.18.1/CSA B125.1</li> <li>Buy American Act (S-9602-PLR only)</li> <li>WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)</li> </ul> <div style="display: flex; justify-content: space-around; align-items: center;">   </div>
	Warranty
	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 

## Architectural/ Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Tub/Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9602-PLR), Adjustable stop screw to limit handle turn (included with S-9602-PLR), Integral diverter control, Metal lever handle, 1 mode showerhead with easy to clean nozzles, 5-1/4" non-diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9602PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

S-9602-PLR, S-9602-PLR-TRM, S9602PLRTRMTC

## Dimensions

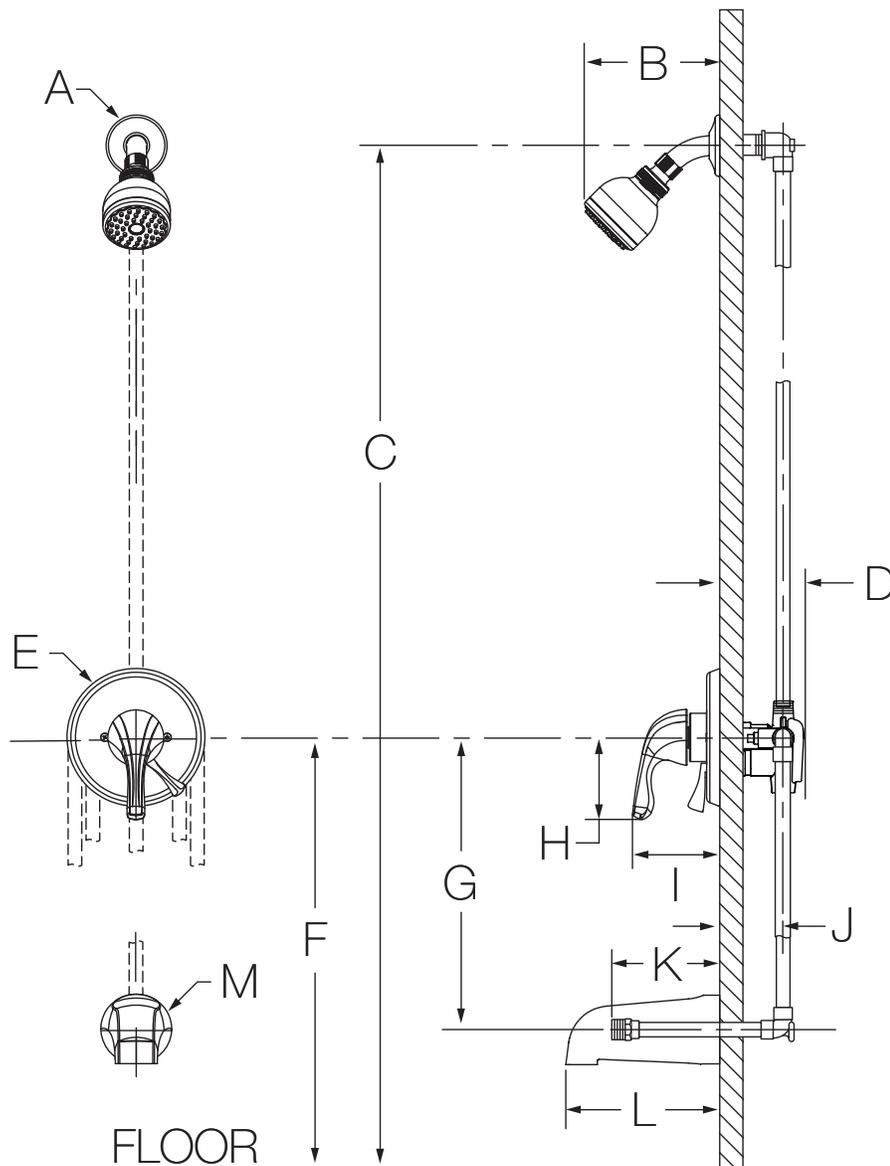

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 5-3/4", 146 mm
F	Ref. 32", 813 mm
G	Ref. 12", 305 mm
H	3-3/8", 86 mm
I	3-5/8", 92 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
K	Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall
L	5-1/4", 133 mm
M	Ø 2-1/2", 64 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.