



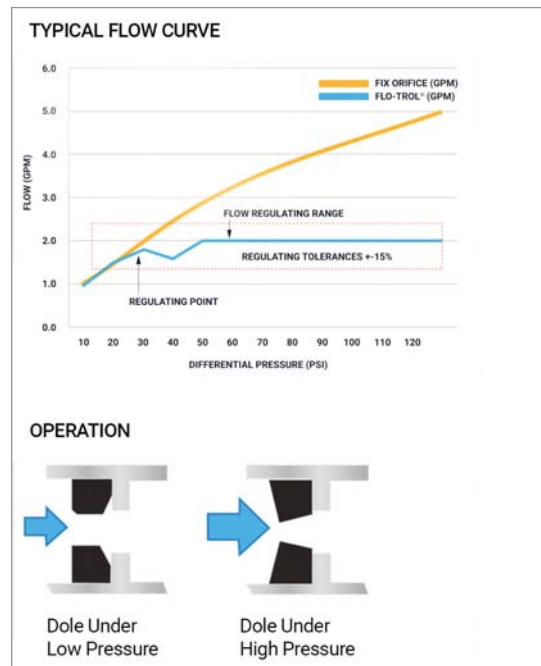

Dole Flow Control Valve Features:

- Prevents over-pumping of low yield wells.
- Installs in the discharge line between check valve and pressure tank.
- Do not use to suspend pipe.
- Self cleaning, designed to deliver constant volume of water over wide pressure drop range.
- Flow rated maintained within +/- 15% up to a pressure drop of 125 psi.
- Maximum system pressure 125 psi.
- Lead Free.

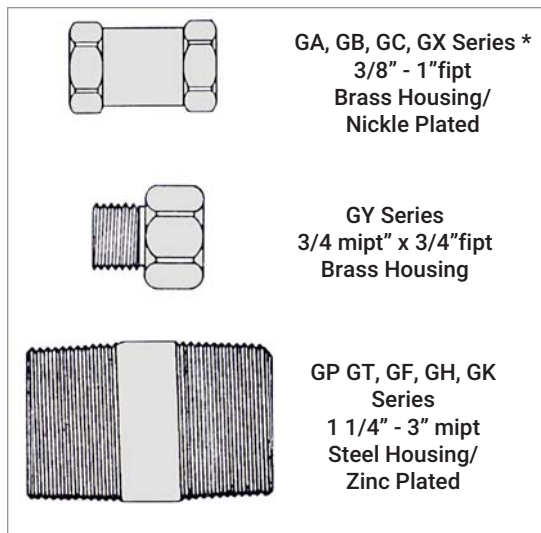

NEW Part Number	OLD	Flow (GPM)	Inlet/Outlet	List Price
Brass Housing/Nickle Plated				
* GA.06		0.06	3/8" fIPT	\$ 40.38
GA.13	DV.13	0.13	3/8" fipt	40.38
GA.19	DV.19	0.19	3/8" fipt	40.38
GA.25	DV2.5	0.25	3/8" fipt	40.38
GA.35		0.35	3/8" fipt	40.38
GA.50	DV5	0.50	3/8" fipt	40.38
GA.75	DV75	0.75	3/8" fipt	40.38
GA1.0	DV10	1.0	3/8" fipt	40.38
Steel Housing/Zinc Plated				
* GB1.0	DV10-1/2	1.0	1/2" fipt	53.43
GB1.5	DV15	1.5	1/2" fipt	53.43
GB2.0	DV20	2.0	1/2" fipt	53.43
GB2.5	DV25	2.5	1/2" fipt	53.43
GB3.0	DV30	3.0	1/2" fipt	53.43
GB3.5	DV35	3.5	1/2" fipt	53.43
GB4.0	DV40	4.0	1/2" fipt	53.43
GB5.0	DV50-1/2	5.0	1/2" fipt	53.43
GB6.0	DV60-1/2	6.0	1/2" fipt	53.43
* GC1	DV1.0	1.0	3/4" fipt	68.63
GC1.5		1.5	3/4" fipt	68.63
GC2.0	DV2.0	2.0	3/4" fipt	68.63
GC2.5	DV2.5-3/4	2.5	3/4" fipt	68.63
GC3.0	DV30-3/4	3.0	3/4" fipt	68.63
GC3.5	DV3.5-3/4	3.5	3/4" fipt	68.63
GC4.0	DV40-3/4	4.0	3/4" fipt	68.63
GC5.0	DV50	5.0	3/4" fipt	68.63
GC6.0	DV60	6.0	3/4" fipt	68.63
GC7.0	DV70	7.0	3/4" fipt	68.63
GC8.0	DV80	8.0	3/4" fipt	68.63
GC9.0	DV90	9.0	3/4" fipt	68.63
GC10	DV100	10.0	3/4" fipt	68.63
GC11.5	DV115	11.5	3/4" fipt	68.63
* GX1.0	DV10-1	1.0	1" fipt	108.13
GX1.5	DV15-1	1.5	1" fipt	108.13
GX2.0	DV20-1	2.0	1" fipt	108.13
GX2.5	DV25-1	2.5	1" fipt	108.13
GX3.0	DV30-1	3.0	1" fipt	108.13
GX3.5	DV35-1	3.5	1" fipt	108.13
GX4.0	DV40-1	4.0	1" fipt	108.13
GX5.0	DV50-1	5.0	1" fipt	108.13
GX6.0	DV60-1	6.0	1" fipt	108.13
GX7.0	DV70-1	7.0	1" fipt	108.13