

Wallmount Sink Faucets

TECK[®]
COMMERCIAL



Specification: (example)

- **CAST BRASS** two handle wallmount sink faucet
 - 203mm (8") centers, polished chrome plated finish
 - **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
 - ADA compliant color indexed metal lever or blade handles with vandal resistant screws
 - **CER-TECK[®]** 1/4 turn ceramic structures
- and ... with ... integral check stops (if required)
 with ... (add spout required)
 with ... (add outlet required)
 with ... (add handle required)
 with ... adjustable centers
 (add Suffix **AC** if required – See Back Page)



Engineer/Architect Approval












Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.		
Less integral stops	28C4		
With integral check stops	28C6		



SPOUT		OUTLET		HANDLE	
0	<input type="checkbox"/>	0	<input type="checkbox"/>	0	<input type="checkbox"/>
1	203mm (8") Wallform Swing Spout (2) (S2) 	1	<input type="checkbox"/>	1	<input type="checkbox"/>
2	203mm (8") Tubular Swing Spout (2) (S5) 	2	Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By Agion [®] 	2	102mm (4") Hooded Blade Handles 
3	<input type="checkbox"/>	3	Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator 	3	76mm (3") Lever Blade Handles 
4	279mm (11") Tubular Swing Spout (2) (S7) 	4	Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator 	4	102mm (4") Blade Handles, Sanitary Hoods 
5	<input type="checkbox"/>	5	Vandal Resistant 0.5 USGPM (1.9 L/min) Flow Control Non-Aerating Spray Outlet 	5	<input type="checkbox"/>
6	<input type="checkbox"/>	6	<input type="checkbox"/>	6	<input type="checkbox"/>
7	<input type="checkbox"/>	7	<input type="checkbox"/>	7	<input type="checkbox"/>
8	<input type="checkbox"/>	8	<input type="checkbox"/>	8	<input type="checkbox"/>
9	Heavy Duty (R4), 152mm (6") Bend Rigid/Swivel Gooseneck Spout (1) 	9	<input type="checkbox"/>	9	<input type="checkbox"/>

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**.
 (2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**.
 Refer to www.specselect.com for individual models.

Flow Rates are at 60 PSI.

Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

CDSP-28C46 Rev. A




TECK[®]
COMMERCIAL

Wallmount Sink Faucets

Approvals:


- CSA certified
 - Complies to ASME A112.18.1
 - Lever Blade Handle No.'s 2, 3 and 4, ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or Local Approvals.)

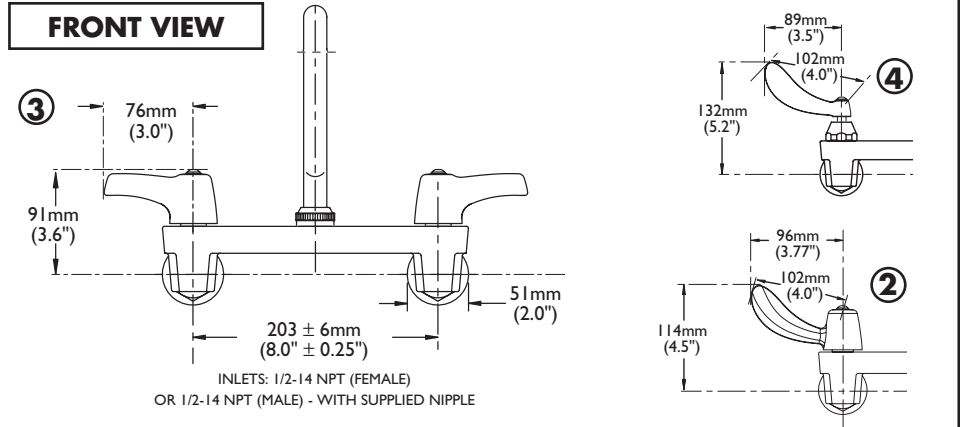


INLETS: 1/2-14 NPT (FEMALE)
OR 1/2-14 NPT (MALE) - WITH SUPPLIED NIPPLE

GOOSENECK SPOUTS


SWING SPOUTS

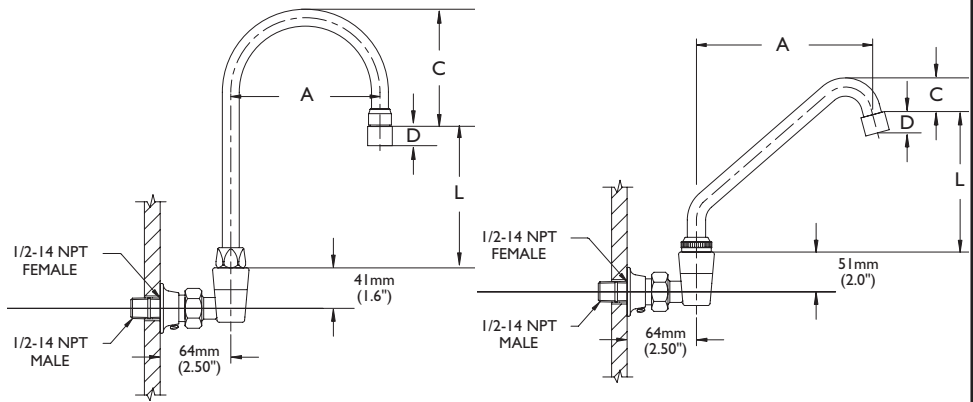

ADJUSTABLE CENTERS
 Add Suffix "AC" to Product Number

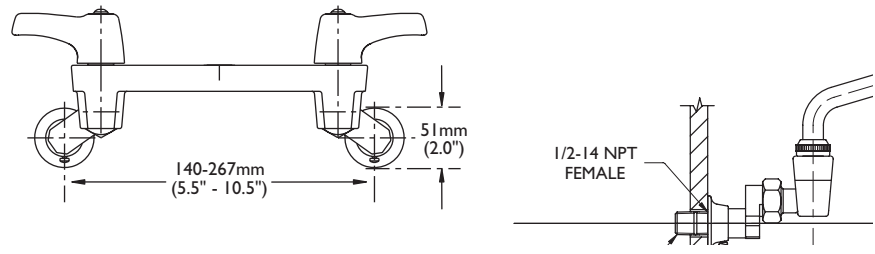

FLOW RATE vs PRESSURE

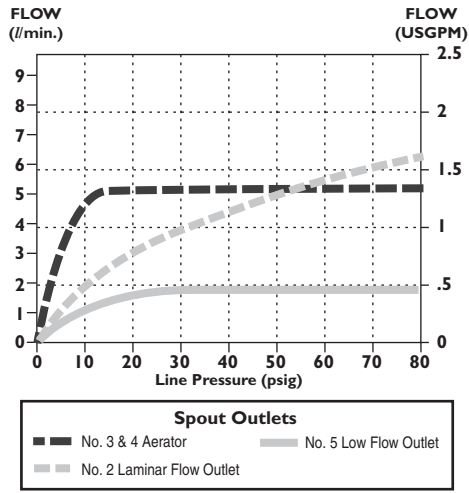

FOR OPTIONAL RIGID/SWIVEL SPOUTS
See DSP-R/S for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

FOR OPTIONAL SWING SPOUTS
See DSP-S/S for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69

GOOSENECK SPOUT ASSEMBLIES							
SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
9	Gooseneck-Standard (R4)	152	6	124	4.9	146	5.8

SWING SPOUT ASSEMBLIES							
SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8
4	11" Tubular Spout (S7)	277	10.9	28	1.1	104	4.1

INLETS - 1/2" FIP/MIP

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.