

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# Series 100DT Drain Tubes

**Size:** 3/4"

Series 100DT Drain Tubes are used to easily provide a safe discharge line from residential water heater temperature and pressure relief valves. No special tools, fittings or sealants are required to install these drain tubes, they are simply hand-tightened to the T&P valve discharge.

Series 100DT Drain Tubes can be used on gas, electric or oil fired water heaters to safely drain water discharged from the heater's temperature & pressure relief valve.

## Features

- Models available for both side and top mounted T&P relief valves
- No special tools required to install, simply hand-tightened
- Can be used on gas, electric or oil fired water heaters
- UPC and IAPMO listed, ASME A112.4.1 approved
- Meets Department of Housing and Urban Development requirements

## Pressure – Temperature

Maximum Operating Temperature: 250°F (121°C)


Maximum Working Pressure: 15psi (103.35 kPa)

## Dimensions – Weights

| MODEL        | CONNECTION<br>SIZE | DROP LENGTH |      | RUN      |     | WEIGHTS |      |
|--------------|--------------------|-------------|------|----------|-----|---------|------|
|              |                    | A<br>in.    | mm   | B<br>in. | mm  | lbs.    | kg.  |
| 100DT        | 3/4"               | 48"         | 1200 | —        | —   | 0.19    | 0.08 |
| 100DT-72     | 3/4"               | 72"         | 1800 | —        | —   | 0.20    | 0.09 |
| 100DT-A60    | 3/4"               | 60"         | 1524 | 8"       | 200 | 2.00    | 0.91 |
| 100DT-A60-12 | 3/4"               | 60"         | 1524 | 12"      | 300 | 2.00    | 0.91 |



Model: 100DT

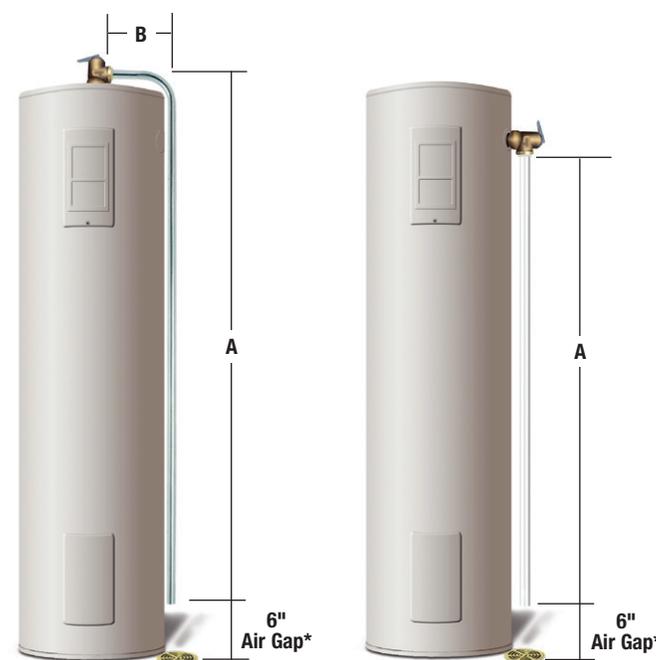

Top Mount T&P Valve

Side Mount T&P Valve

**\* Drain tube must be trimmed to 6" above drain so that any relief discharge will be visible.**

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



**USA:** T: (978) 689-6066 • F: (978) 975-8350 • Watts.com  
**Canada:** T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca  
**Latin America:** T: (52) 81-1001-8600 • Watts.com