



## Underscore® Rectangle

5.5' Bath  
K-1821-W1



### Features

- End drain.
- Slotted overflow for deep soaking.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support.
- 66" (1676 mm) x 32" (813 mm) x 22" (559 mm)

### Material

- Acrylic

### Installation

- Drop-in or under-mount.

### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-550 Under-mount Installation Kit  
K-24916 Wireless Music Kit  
K-1177 Vinyl Tiling-in Bead



### Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color                                                                                | Code | Description   |
|--------------------------------------------------------------------------------------|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).



1-13-2018 02:28

THE BOLD LOOK  
OF **KOHLER**®

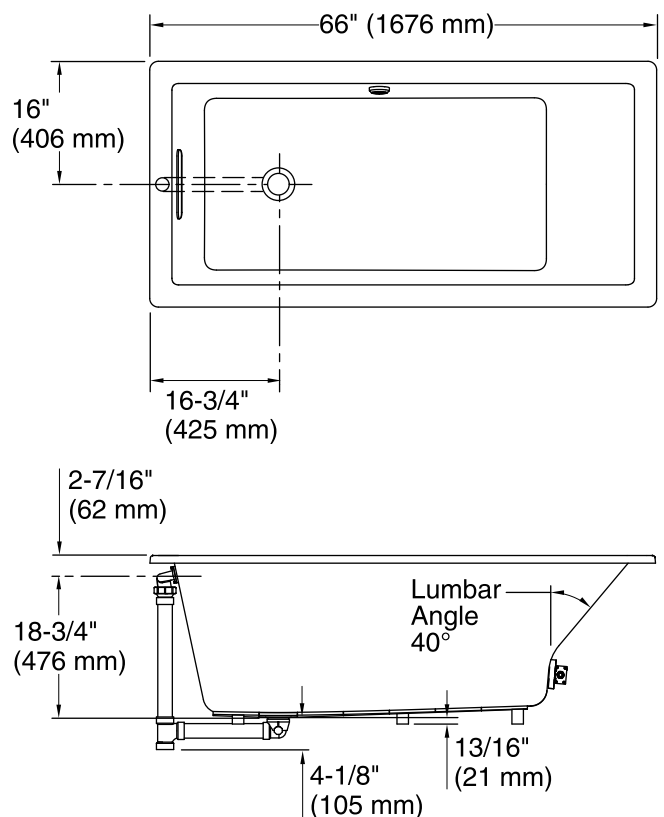

No change in measurement if connected with drain illustrated. (K-7272)

Access Panel  
20" (508 mm) W x  
15" (381 mm) H

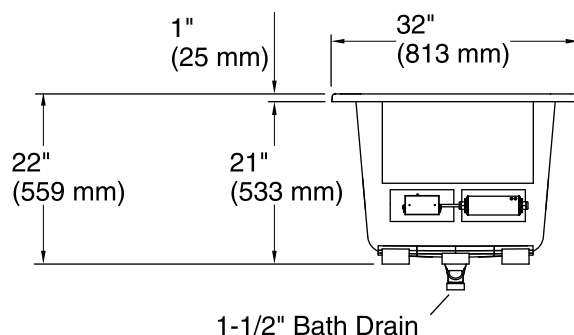

### Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A

### Technical Information

All product dimensions are nominal.

|                              |                                               |
|------------------------------|-----------------------------------------------|
| Installation:                | Drop-in, Under-mount                          |
| Drain location:              | End                                           |
| Basin area, bottom:          | 44-1/2" x 22-5/16" (1130 mm x 567 mm)         |
| Basin area, top:             | 59-5/8" x 25-1/2" (1514 mm x 648 mm)          |
| Weight:                      | 92 lbs (41.7 kg)                              |
| Minimum floor load:          | 50 lbs/ft² (244.1 kg/m²)                      |
| Water depth:                 | 18" (457 mm)                                  |
| Water capacity:              | 85.8 gal (324.8 L)                            |
| Cutout:                      | Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm) |
| Electrical component rating: | Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W     |
| Minimum flat for door:       | 2-1/2" (64 mm)                                |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Kit is required for under-mount installations (sold separately).