

Tub and Shower

MultiChoice™ valve body only with screwdriver stopswith ½" universal inlets/outlets

Model No: R10000-UNWS

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- (Contact Delta Representative for State and/or Local Approvals)



SPECIFICATION:

- Forged brass body
- Back-to-Back installation capabilities
- Can be tested with air (200 psi) or water (300 psi) without valve using supplied test cap
- Square plasterguard allows for right angle cuts.
- For use with MultiChoice® Universal single or dual function trim.
- Cartridge ships with trim.
- 1/2" outlets and connections.
- MultiChoice[™] valve body only with screwdriver stops sold only in full cases of 12
- 1/2" NPT male thread with 1/2" C.W.T. female sweat with screwdriver stops


OPERATION:

• Designed for routine 10 minute 180°F (82°C) disinfection cycles

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 14, 2015.



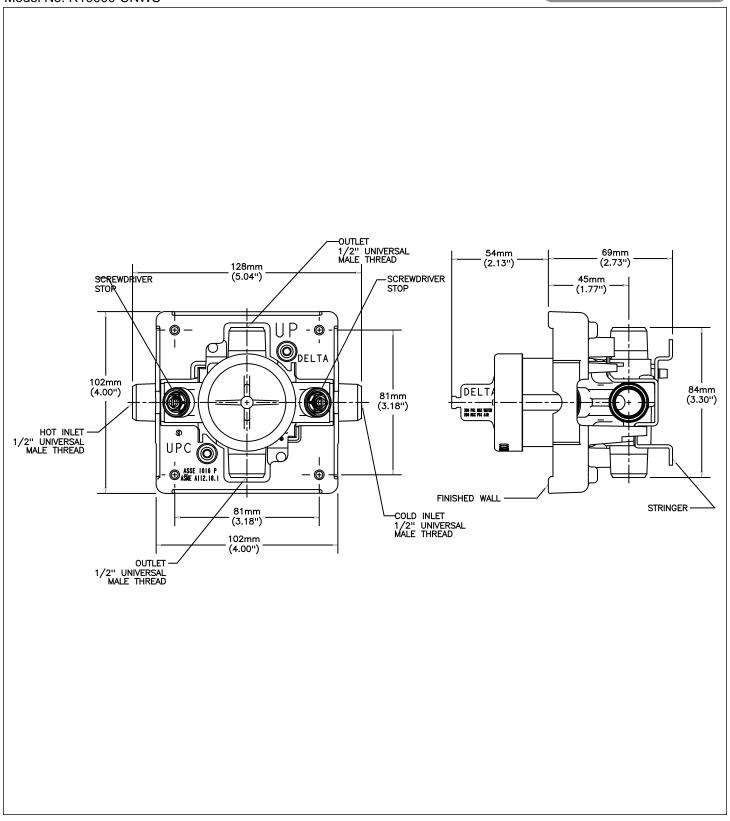

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 14, 2015.