




# 444

## HVAC Bubble Wrap Tape

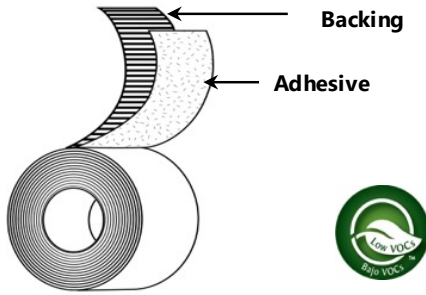

<b>Backing:</b>	OPP Film
<b>Adhesive:</b>	Acrylic
<b>Liner:</b>	N/A
<b>Colors:</b>	Metallic
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 55m, 72mm x 55m

### Applications

- Wrapping and protecting bubble wrap insulation for HVAC pipes

### Features

### Benefits

• OPP Backing	• Tough and durable
• Acrylic Adhesive	• Hand tearable for ease of use
• Low VOC Content	• Solvent-Free for reduced odor
	• Aggressive bond - won't flag or lift
	• Mold and moisture resistant
	• Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	3.1 mils	0.079 mm	ASTM D-1000
<b>Adhesion to Steel</b>	45 oz/in	4.92 N/cm	PSTC-101
<b>Adhesion to Backing</b>	35 oz/in	3.83 N/cm	PSTC-101
<b>Tensile Strength</b>	34 lb/in	59.54 N/cm	ASTM D-1000
<b>Operating Temperature</b>	-40 to 212 °F	-40 to 100 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND's knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.