

## Features

- Includes face plate with handle, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean<sup>™</sup> sprayface for easy cleaning.
- Complements the Purist faucet and accessory collections.

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

### Installation

• Trim set requires valve to complete installation.

### **Required Accessories**

K-304/K-P304 Series Rite-Temp® Valves

### or

K-8304/K-P8304 Series Rite-Temp $\ensuremath{\mathbb{B}}$  Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

### or

K-2971-KS 3/4" Pressure-balancing Valve

### **Optional Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies



**Purist**®





### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Color/Finishes**

Color tiles intended for reference only.

### Color Code Description


CP	Polished Chrome
SN	Vibrant® Polished Nickel
BGD	Vibrant® Moderne Brushed Gold
BN	Vibrant® Brushed Nickel
BV	Vibrant® Brushed Bronze
<b>D</b> 1	

BL Matte Black



# KOHLER. Faucets

Purist® Rite-Temp® Shower Valve Trim K-TS14422-4

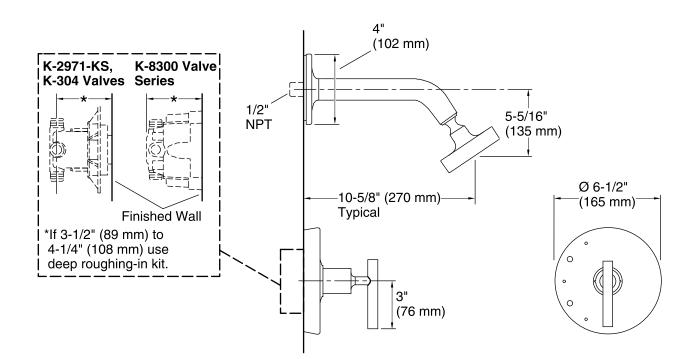

### **Technical Information**

All product dimensions are nominal.

#### Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min) Pressure: 80 psi (5.5 bar)

### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

