



6' Drop-In Bath with Bask™ Heated Surface K-1137-W1

### **Features**

- Bask<sup>™</sup> heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Customize the heat with three adjustable settings.
- Generous 6-foot length provides spacious bathing for up to two people.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Center drain.

### Material

Acrylic

### Installation

Drop-in or under-mount.



## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™





# **Underscore®**

# 6' Drop-In Bath with Bask™ Heated Surface K-1137-W1

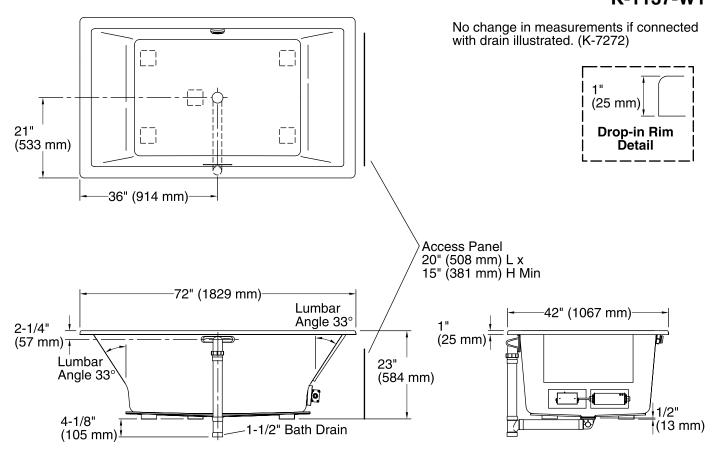

## **Required Electrical Service**

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in/Undermount

Drain location: Center

Basin area, bottom: 45-3/4" x 32" (1162 mm x 813 mm)
Basin area, top: 66" x 36" (1676 mm x 914 mm)

Weight: 91 lbs (41.3 kg)

Minimum floor load: 60 lbs/ft<sup>2</sup> (292.9 kg/m<sup>2</sup>)

Water depth: 19" (483 mm)
Water capacity: 139 gal (526.2 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x

1029 mm)

Under-mount kit: 592

Electrical rating: Heated Surface: 120 V, 0.5 A, 60 Hz

#### **Notes**

Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

