

Product Features

- Operating Temperature: 32°F-176°F
- Operating Pressure: 180 PSI
- Burst Pressure: 1200 PSI
- Hose Brabs: Low Lead Brass
- Washers: Rubber
- Nut: Heavy Duty Nickel Plated Brass
- Ballcock Nut: POM
- Inner Hose: Heavy Duty Reinforced PVC
- Outer Wire Braid: 304 Stainless Steel Wire
- Ferrules: Brass




4PRO38.78COMPF12BTS

Model Numbers

4PRO38.78COMPF9BTS
 4PRO38.78COMPF12BTS
 4PRO38.78COMPF16BTS
 4PRO38.78COMPF20BTS

3/8" Comp x 7/8" Ballcock x 9" SS Braided Toilet Supply
 3/8" Comp x 7/8" Ballcock x 12" SS Braided Toilet Supply
 3/8" Comp x 7/8" Ballcock x 16" SS Braided Toilet Supply
 3/8" Comp x 7/8" Ballcock x 20" SS Braided Toilet Supply

Dimensions

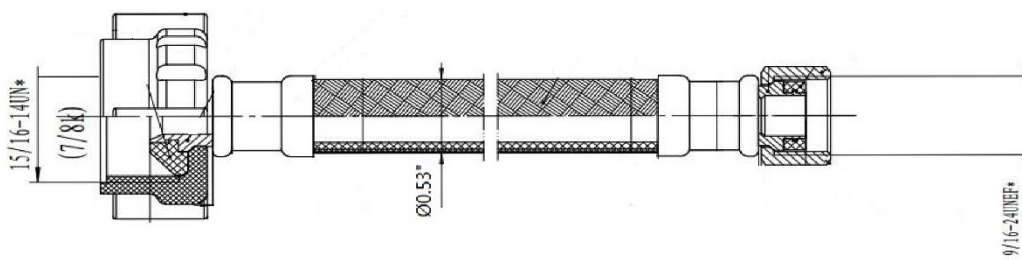

Job Name			
Date		Quantity	
Model Specified		Customer	
Architect/engineer		Contractor	