

## For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

### HUS-12 Garden Hose Swivel Union – Female Hose Thread

**Use:** For use with residential and commercial grade garden hose. All female hose thread connections require a rubber washer (sold separately) inserted prior to installation

**Operating Specifications:**


**Temperature:** -35° - 100°F  
**Working Pressure:** 75 PSI maximum,  
intermittent to 150 PSI

**Standard**

MATERIAL SPECIFICATIONS	
<b>Fitting Body</b>	<b>C36000 brass</b>

**Compliant**

MATERIAL SPECIFICATIONS	
<b>Fitting Body</b>	<b>Compliant brass</b>

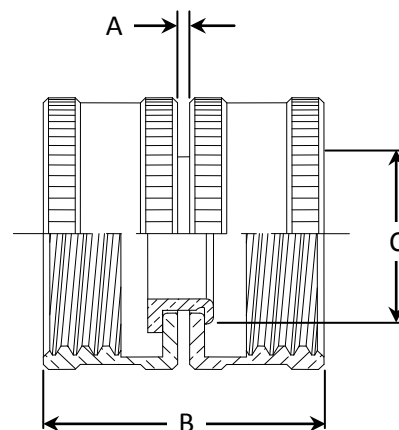

**Standard Part Listing:**

- ☐ HUS-12 3/4" Female Hose Thread x 3/4" Female Hose Thread, swivel, rough brass
- ☐ HUS-12 B 3/4" Female Hose Thread x 3/4" Female Hose Thread, swivel, rough brass, bulk

**Compliant Part Listing:**

- ☐ HUS-12X 3/4" Female Hose Thread x 3/4" Female Hose Thread, swivel, rough brass
- ☐ HUS-12X B 3/4" Female Hose Thread x 3/4" Female Hose Thread, swivel, rough brass, bulk

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIA. C
HUS-12	.05	1.17	.80
HUS-12-1	.05	1.17	.80

**Listings & Certifications:**

- Compliant product CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**