


HYDRONIC GAUGES

Tridicator, Steam, Combination, Altitude, Temperature

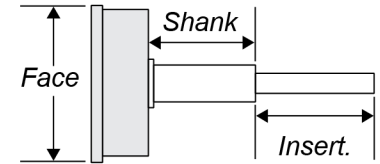

Dimensions and range specifications may vary slightly from those shown

Item No.	Ref. No.	Type	Mount	Face	Shank	Insert.	Range / Description	Representative Picture
5WH25-1PK H25-1 H25-2 H25-3	PTA-224C PTA-234C PTA-322C PTA-322L	Tridicator	1/4" CBM 1/4" CBM 1/2" CBM 1/2" LM	2-5/8" 2-1/2" 3-1/4" 3-1/4"	7/8" 2" 1-1/4" 1"	1" 1" 1-1/8" 3/4"	70°- 320°F, 20°- 160°C 0 - 75 PSI, 0 - 170 Ft H ₂ O	
H25-10 H25-12	5495 5549	Steam gauge	1/4" LM 1/4" LM	3-1/2" 4-1/2"	- -	- -	30" Hg. - 30 PSI 30" Hg. - 30 PSI	
H25-15 H25-16 H25-17 H25-18 H25-19 H25-20	135393 135392 144435 144434 144826 144827	PT 1088 Combination temperature and pressure gauge	1/4" CBM 1/4" CBM 1/2" LBM 1/2" LM 1/2" LM 1/2" LBM	2-1/2" 2-1/2" 4-1/4" 4-1/4" 4-1/4" 4-1/4"	2" .79" 1-3/4" 1-1/8" 1-1/8" 1-3/4"	1-5/8" 1.73" 2" 2" 2" 2"	70°- 320°F, 75 PSI 60°- 320°F, 75 PSI 60°- 260°F, 50 PSI 60°- 260°F, 75 PSI 80°- 320°F, 200 PSI 70°- 320°F, 200 PSI	
H25-30	46775	Altitude	1/4" LM	3-1/2"	-	-	100 PSI, 0 - 231 FT	
H25-50 ¹ H25-51 ² H25-52 ¹ H25-53 ²	T-571 T-571 Brass HWT-A T-572 Brass	Hot water glass tube thermometer	1/2" LM 1/2" LM 1/2" LBM 1/2" LBM	- - - -	1-5/8" 1-1/8" 1-1/8" 1-1/8"	1-3/8" 1-3/8" 1-3/8" 1-3/8"	40°- 280°F, Vertical 40°- 260°F, Vertical 40°- 280°F, Vertical 40°- 280°F, Vertical	
H25-54	T-1050	Hot water thermometer	1/2" LM	3-1/2"	1"	2"	60°- 260°F	
H25-90 ³ H25-92 ⁴ H25-96 ⁵	HWT-D - -	Dial Thermometer	CBM CBM CBM	2-1/2" 2-1/2" 2-1/2"	3/4" - -	1-1/4" 2" -	32°- 248°F 32°- 248°F 0°- 250°F	

¹ Steel immersion well

² Brass immersion well

³ 1/2" - NPT(M) pipe mount (pictured at right)

⁴ 3/4" CWT sweat mount (detachable mount soldered in place)

⁵ Surface mount (retaining spring for mounting included)

CBM = Center back mount

LBM = Low back mount

LM = Low mount (bottom)

