

**Features**


- 1/2" NPT connections
- Available 27- or 54-nozzle configurations
- 2 gallons (7.6 L) per minute flow rate at 80 psi (551.6 kPa)

**BODYSPRAY**  
**K-8013**  
**ALSO K-8014**


**Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992



**K-8013**



**K-8014**

**Colors/Finishes**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

**Specified Model**

Model	Description	Colors/Finishes	
K-8013	27-nozzle bodyspray	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-8014	54-nozzle bodyspray	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

**Product Specification**


Bodyspray shall feature 27-nozzle or 54-nozzle spray configurations. Product flow rate shall be 2 gallons (7.6 L) per minute maximum at 80 psi (551.6 kPa). Bodyspray shall have 1/2" NPT connection. Bodyspray shall be Kohler Model K-\_\_\_\_-\_\_\_\_.

# WATERTILE™ ROUND




## Installation Notes

Install this product according to the installation guide.

**K-8013**

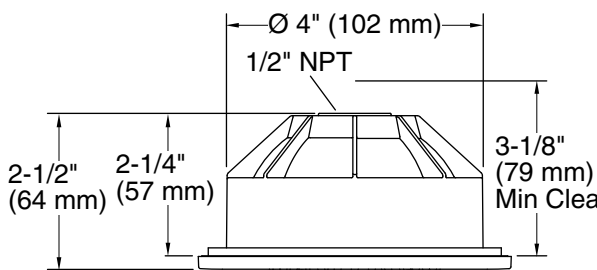

**K-8014**

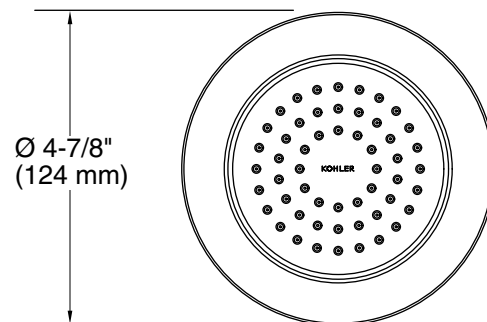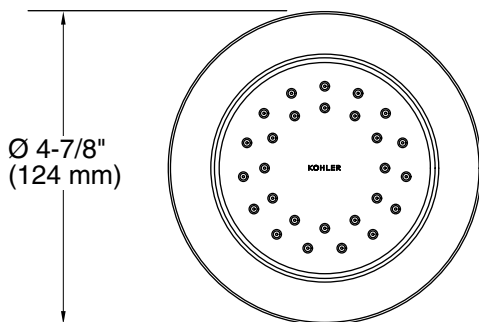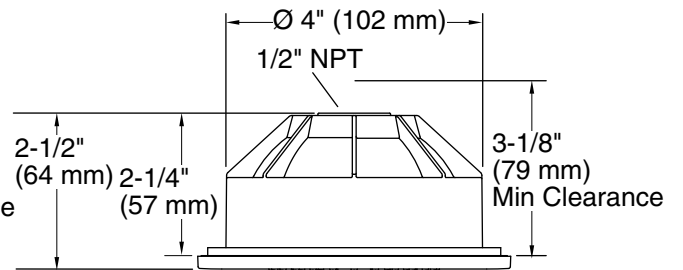

## Product Diagram