


Drain Pump for Ceiling Suspended models **PAC-SH83/84/85DM-E**

Photo

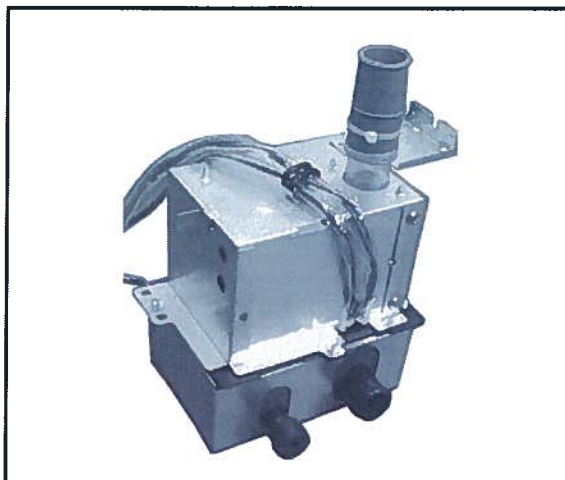

Descriptions

Raises drain generated during unit's operation to secure the appropriate angle of the drain pipe.

Applicable Models


Drain pump	PAC-SH83DM-E	PAC-SH84DM-E	PAC-SH85DM-E
Applicable models	PCA-RP50KA	PCA-RP71KA PCA-RP100KA PCA-RP125KA PCA-RP140KA	PCA-RP60KA

Specifications

Rated power	220V AC, single-phase, 50/60Hz
Power consumption	12/10.8W
Operating current	0.114/0.092A
Drain lift	Max. 600mm from indoor unit's top surface
Discharge rate	24 ℓ/h or more
Driving motor	Shading type (Class E insulation)
Drain piping	Connected to drain outlet. PVC pipe VP-20 (O.D.Φ26) can be used.

Dimensions

Unit : mm

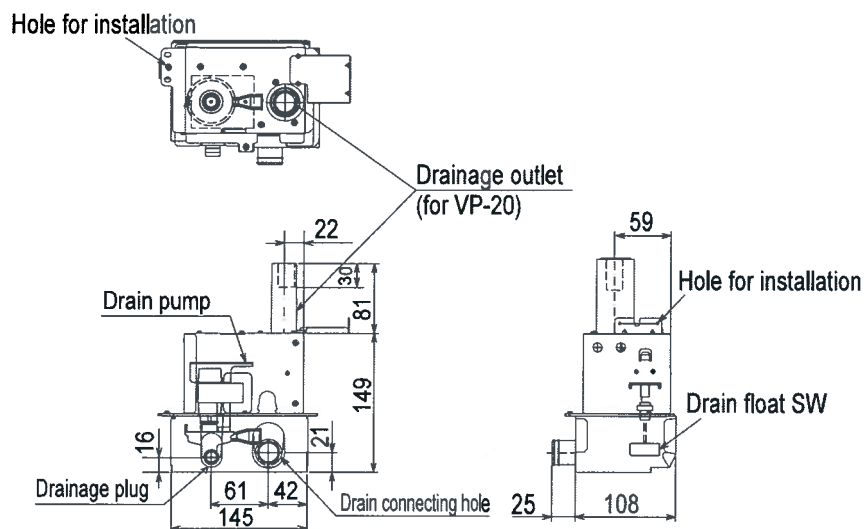

OPTIONAL
PARTS