


Descriptions

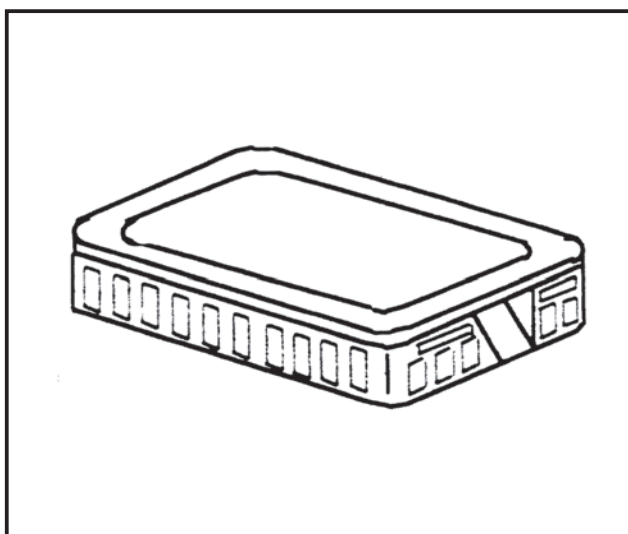

Enables to pick up the room tempreture at the remote position.

Applicable Models

- | | |
|-------------------|------------------|
| ■ SLZ-KA VA(L) | ■ PKA-RP HAL/KAL |
| ■ SEZ-KD VA(L) | ■ PCA-RP KA/HA |
| ■ PLA-RP BA(2)(3) | ■ PEAD-RP JA(L) |
| ■ PEA-RP GA | ■ PSA-RP GA |

Specifications

External dimensions (mm)	120 (H) x 70 (W) x 15 (D)
Exterior	White gray (Munsell 4.48Y 7.92/0.66) Material: ABS resin
Operating conditions	Temperature: -20 to 65°C Humidity: 30 to 90%RH (no condensation)
Installation method	Mounting on single-type switch box (JIS C8336) or directly mounting on wall
Accessory	2-wire cable (12m), Connector with post, Fixing screw (x2)
When combining with environmental measurement controller	
Temperature measuring range	-20 to 65°C
Measurement resolution	0.1°C (10 to 35°C), 0.5°C (other temperature ranges)

Dimensions

Unit : mm

