




Engineered, Assembled, and Tested in the USA.
You can depend on the quality and craftsmanship behind the GS.

GS

STAINLESS STEEL SUBMERSIBLE PUMP FOR 4" AND LARGER WELLS
60 HZ, 1/2 - 5 HP • VFD COMPATIBLE - UP TO 80 HZ

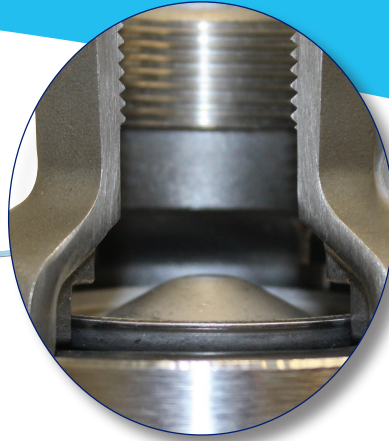

- Premium quality stainless steel internal check valve helps to minimize water loss
- Convenient Serviceability: The GS features longer thread engagement in the casing for greater strength and convenient repairs
- Floating Stack Hydraulic: proven for over 5 decades
- The Guardian System: Includes an engineered polymer bearing which is resistant to damage from sand, abrasives, and over-pumping a well.
- Dual Surface Upthrust Washer providing improved protection to the internal components during upthrust


 **GOULDS**
WATER TECHNOLOGY
a xylem brand

WATER END DATA

Series	Model	Req. HP	Stages	Length (in)	Weight (lbs)
5GS	5GS05R	0.5	9	12.9	8
	5GS05	0.5	12	15.0	9
	5GS07	0.75	15	17.0	11
	5GS10	1	20	21.7	13
	5GS15	1.5	26	25.8	15
	5GS20	2	33	31.6	19
7GS	7GS05R	0.5	7	11.7	6
	7GS05	0.5	10	13.8	7
	7GS07	0.75	13	16.0	8
	7GS10	1	17	18.8	9
	7GS15	1.5	22	23.6	12
	7GS20	2	27	27.2	13
	7GS30	3	34	33.2	18
10GS	10GS05R	0.5	5	10.1	6
	10GS05	0.5	7	11.5	7
	10GS07	0.75	10	13.6	8
	10GS10	1	12	15.0	9
	10GS15	1.5	17	18.4	12
	10GS20	2	20	21.7	13
	10GS30	3	27	27.5	18
	10GS50R	5	35	33.0	21
	10GS50	5	42	40.2	24

Series	Model	Req. HP	Stages	Length (in)	Weight (lbs)
13GS	13GS05	0.5	5	10.1	6
	13GS07	0.75	7	11.5	7
	13GS10	1	10	13.6	8
	13GS15	1.5	12	15.0	9
	13GS20	2	17	18.4	12
	13GS30	3	21	22.3	15
18GS	18GS07	0.75	6	11.8	7
	18GS10	1	8	13.5	8
	18GS15	1.5	11	16.1	10
	18GS20	2	14	18.6	11
	18GS30	3	19	24.1	15
	18GS50R	5	24	28.3	17
	18GS50	5	30	34.4	21
25GS	25GS10	1	7	13.4	8
	25GS15	1.5	9	15.3	9
	25GS20	2	11	17.2	10
	25GS30	3	15	20.9	14
	25GS50R	5	22	28.7	17
	25GS50	5	26	33.4	21

PERFORMANCE AREA CURVE

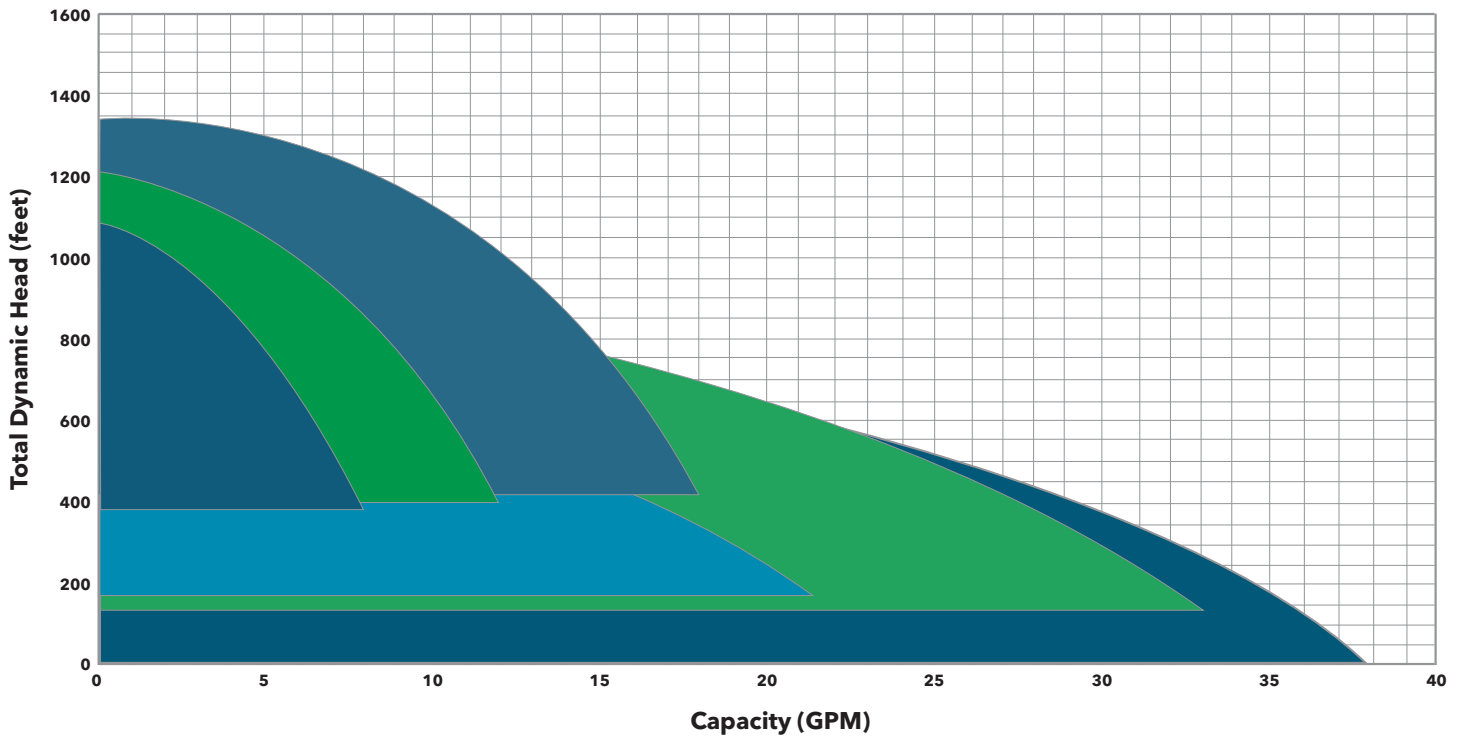

Xylem Inc.
 2881 East Bayard Street Ext., Seneca Falls, NY 13148
 Phone: (866) 325-4210 • Fax: (888) 322-5877
www.gouldswatertechnology.com

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
 © 2015 Xylem Inc. GSSALES October 2015