



# Omega Pack



## Mini condensate removal Pump

The performance of our Si-20 with a sleek case for install under the air conditioning unit.



### SUITABLE FOR

- Up to 5.5 tons
- Wall mounted units

### PERFORMANCE

- 5 gph max. flow
- 33' max. discharge

### Key features

- Modern design
- Reversible mounting
- Rubber dampers
- Drain safe device

## Omega Pack tech specs

**MAX. FLOW RATE:** 5.0 gph

**MAX. DISCHARGE HEAD:** 33ft; flow rate = 1 gph

**MAX. PRESSURE:** 46ft; flow rate = 0 gph

**SOUND LEVEL AT 3.3FT:** 22 dBA according to EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)

**POWER SUPPLY:** 120 V ~ 60 Hz - 14 W (OP20UL01UN12)  
230 V ~ 50/60 Hz - 14 W (OP20UL01UN23)

**INSULATION CLASS:** Double Insulation

**DETECTION LEVELS:** On: 5/8" • Off: 7/16" • Safety: 3/4"

**SAFETY SWITCH:** NC 8A resistive - 250 V

**THERMAL PROTECTION:** 240°F auto-reset

**OPERATING CONDITIONS:** 120V - 50%: 3s ON – 3s OFF  
230V - 60%: 3s ON – 2s OFF

**COLOR:** RAL 9010 – Pure white

**COVER DIMENSIONS:** L 12 7/8" x W 2 1/4" x H 2 1/2"

**SAFETY STANDARDS:** UL / CSA certified by Intertek


**RoHS & WEEE DIRECTIVES:** Compliant

**PACKAGING:** 1.61 lbs - L 14 1/8" x W 3 3/8" x H 4"

**MASTERPACK:** 6 pieces




### Actual flow rates (GPH)

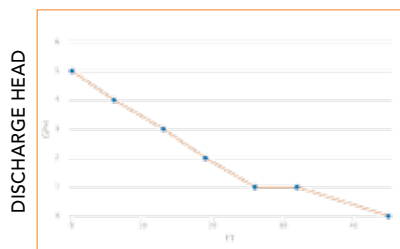

FLOW RATE



### Sound level

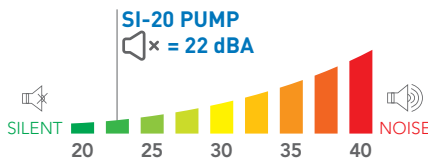

### Recommended accessories



- Clear PVC hose, 1/4" i.d.**
- ACC 00105: 16ft roll
  - ACC 00150: 164ft roll



- Self-sealing fitting to connect discharge tube to drain pipe.**
- 6 pcs, for 1/4" i.d.

### What's in the box



- Si-20 piston pump with clear pvc tube fitted with a pre-mounted drain safe device
- 5' power cable: 2 power wires, 2 safety contact wires
- Anti-vibration rubber damper
- Case, 2 pieces: backplate & cover
- 3 screw & plugs for affixing backplate
- Detection unit – Si2958, 2' cable
- Detection unit installation kit:
  - Rubber elbow
  - Vent tube
  - Split connector
  - 3 double wire clamps
  - 3 tie wraps



SCAN THIS QR CODE FOR ADDITIONAL OMEGA PACK TECHNICAL INFORMATION