PRODUCT SPECIFICATIONS

Elkay WaterSentry Plus Replacement Filters (Bottle Fillers) 3-pack.
Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".

Dimensions:	3-1/8" x 3-1/8" x 9-1/2"
Shipping Weight:	4 lbs.
Flow Rate:	1.5 GPM (5.6 L/m)
Capacity:	3000 gal. (11356 L)
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube

Special Note: Replacement filter for use in ezH2O bottle filling stations and with EWF3000 WaterSentry Plus systems.

- Multi-pack replacement filters for models with WaterSentry Plus filtration system (Bottle Fillers).
- Filter should be replaced every 3,000 gallons or 1 year after installation.
- Equipped with quick-disconnect, 1/4 turn installation, as well as automatic inlet shut-off valve that closes when filter is removed.
- Designed to reduce lead, particles and chlorine. Also reduces odors and discoloration from incoming water.
- Spun Polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media.
- Filter is certified to NSF 42 and 53 for lead, particulate class 1, chlorine, taste and odor reduction.

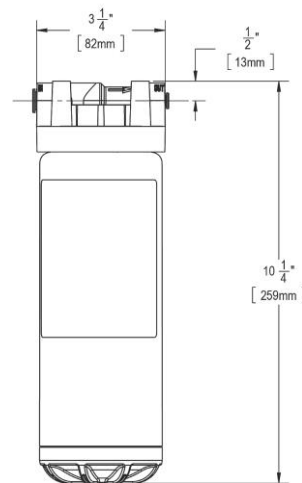**Included with Product:** **Multipack Filters (3000 gal)**

AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

Product Compliance: NSF 372 (lead free)
NSF 42
NSF 53

Installation Instructions (PDF)

PART:_____QTY: _____

PROJECT:_____

CONTACT:_____

DATE:_____

NOTES:_____

APPROVAL:_____

Elkay REV 04162022
51300C_3PK

1333 Butterfield Road, Suite 200
Downers Grove, IL 60515

© 2022   Page 1
51300C_3PK_spec.pdf