

Stainless-steel manifold assembly, 1 1/4" with flow meter

Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Stainless Steel
Manifold size	1.25 inch
Loop Cv	1.1 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	68 °F (20 °C) at 145 psi (10 bar) 158 °F (70 °C) at 87 psi (6 bar) 194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	21 gpm
Prop 65 label required?	Yes

Product information and application use

The 1 1/4" Stainless-steel Manifold Assembly with flow meter comes fully assembled and ready for installation. Use the included flow meters located on the supply manifold to balance the loops across the manifold. The return manifold comes equipped with isolation valves for easy loop isolation. For multiple zoning on the manifold, the black caps are removed and replaced with Uponor Thermal Actuators. The manifold body ends have R32 union connections and the loop outlets have R20 male threads. The included manifold supply and return ball valves come with an R32 x 1" NPT or R32 x 1 1/4" NPT connection. Note: The 1 1/4" manifolds with 2 through 7 loops are strategically designed with 1" NPT ball valves to avoid adding extra costs while maintaining the maximum flow of the manifold assembly.

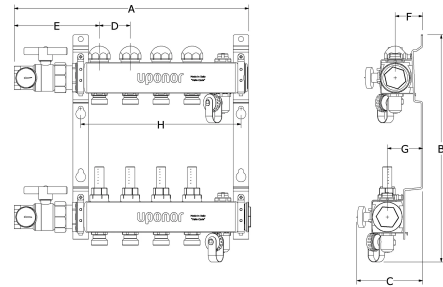

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 2 loops	A2720202	10.933	14.46	3.542	1.969	5.425	1.75	2.25	6.342	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 3 loops	A2720302	12.902	14.46	3.542	1.969	5.425	1.75	2.25	8.249	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 4 loops	A2720402	14.87	14.46	3.542	1.969	5.425	1.75	2.25	10.211	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 5 loops	A2720502	16.839	14.46	3.541	1.969	5.425	1.75	2.25	12.131	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 6 loops	A2720602	19.066	14.47	3.456	1.969	5.504	1.75	2.25	14.175	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 7 loops	A2720702	20.776	14.46	3.542	1.969	5.425	1.75	2.25	16.156	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 8 loops	A2720802	23.095	14.46	3.439	1.969	5.776	1.75	2.25	18.262	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 10 loops	A2721002	27.291	14.47	3.415	1.969	5.855	1.75	2.25	22.189	-	-
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 12 loops	A2721202	31.228	14.47	3.415	1.969	5.855	1.75	2.25	26.106	-	-

Part name	Part no.	K [inch]	L [inch]	M [inch]	N [inch]	Weight per UOM [lbs/UOM]
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 2 loops	A2720202	-	-	-	-	9.22
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 3 loops	A2720302	-	-	-	-	10.12
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 4 loops	A2720402	-	-	-	-	11.02
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 5 loops	A2720502	-	-	-	-	11.92
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 6 loops	A2720602	-	-	-	-	12.82
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 7 loops	A2720702	-	-	-	-	13.72
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 8 loops	A2720802	-	-	-	-	15.32

Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 10 loops	A2721002	-	-	-	-	17.12
Stainless-steel Manifold Assembly, 1 1/4" with flow meter, B&I, ball valve, 12 loops	A2721202	-	-	-	-	18.92

Installation	Related applications
The 1 1/4" Stainless-steel Manifolds are fully assembled and ready for installation. Manifold assembly comes with mounting brackets, isolation valves, balancing valves, fill/purge ports, air vents, ball valves, temperature gauges and end caps. Manifold adapters and fittings are sold separately. For further information, refer to the Uponor Stainless-steel Manifold Installation Guide.	<ul style="list-style-type: none"> Radiant Heating and Cooling Systems Permafrost Protection Systems Turf Conditioning Systems AquaSAFE™ Fire Safety Systems

Codes	Standards	Listings
-	-	-

Footnotes	Contact information		
-	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center; width: 50%;"> Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 </td> <td style="text-align: center; width: 50%;"> Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517 </td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		