

■ Curb Box - Minneapolis Pattern


Base Tapped 1 1/2"

5610

- Upper Section - 1" I.D.
- Includes 5660 shut-off rod
- 5607L Lid - with 1" pentagon plug
- For use with inverted plug type curb stops 1/2", 5/8", 3/4"
- For use with ball valve curb stops 3/4", 1" (ball size)

5612 Erie Pattern

- Upper Section - 1" I.D.
- Includes 5660 shut-off rod
- 5601L Lid - 2 hole Erie pattern
- For use with inverted plug type curb stops 1/2", 5/8", 3/4"
- For use with ball valve curb stops 3/4", 1" (ball size)

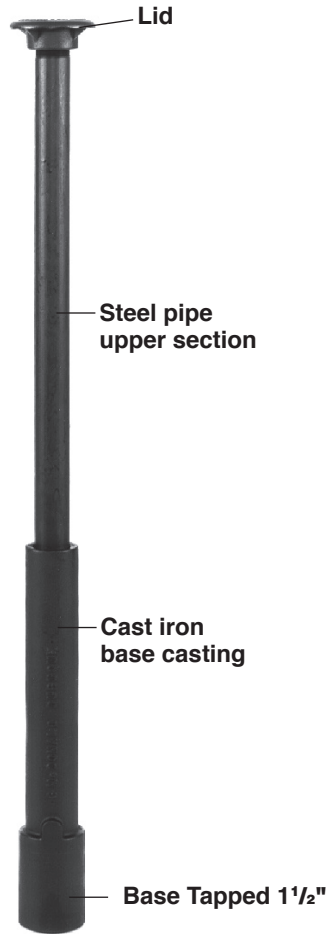

5614

- Upper Section 1 1/4" I.D.
- Shut-off rod available
- 5614L Lid - with 1 1/4" pentagon plug
- For use with inverted plug type curb stops 1/2", 5/8", 3/4"
- For use with ball valve curb stops 3/4", 1" (ball size)

5622

- Upper Section - 1 1/2" I.D.
- Shut-off rod available
- 5623L Lid - with 1 1/2" pentagon plug
- For use with inverted plug type curb stops 1/2", 5/8", 3/4"
- For use with ball valve curb stops 3/4", 1" (ball size)
- Base casting includes 3126-626 Bushing 2" MIP x 1 1/2" FIP



For shut-off rods, see page 12

■ Standard Lids



5601L
Tapped 1"
Erie Pattern



5607L*
Tapped 1"



5614L*
Tapped 1 1/4"



5623L
Tapped 1 1/2"

* For available lid options, see page 12

■ Notes

- Order by model number and maximum extended lengths from 2 1/2' thru 10' (in 6" increments). Example: 5603 8 1/2'
- When rods are furnished with Curb Boxes, they are 18" shorter than maximum extended length of Curb Box.
- All Curb Boxes telescope one foot. Lengths shown are at maximum extension:
Example: A 5' Curb Box can be used at depths ranging from 4' to 5'.