



#600-OV (60")  
#601-OV (100")



#605-OV 90° One Piece  
Vertical Oval Elbow



#606-OV 90°  
4-Piece Flat Oval Elbow



#607-OV 45° One Piece  
Vertical Oval Angle



#608-OV 45°  
Flat Oval Angle



#612-OV Round to Oval  
End Boot



#613-OV Round to Oval  
Straight Boot



#620-OV Standard Oval  
Stackhead



#622-OV Double Oval  
Stackhead



#625-OV Oval Adapter  
(not crimped)



#630-OV Oval Box 90°



#610-OV/#611-OV 90°  
Round to Oval 90° Boot



#635-OV Oval Box 45°




#640-OV Oval Starting Collar  
(not crimped)

**Oval Pipe and Fittings**

Catalog Number	Ctn.	Item	5"	6"	7"	8"
<b>600-OV</b>	5 →	60" Oval Pipe	•	•	•	-
<b>601-OV</b>	5 →	100" Oval Pipe	•	•	•	•
<b>605-OV</b>	12 →	Oval Vertical Elbow 90°	•	•	•	•
<b>606-OV</b>	12 →	Oval Flat Elbow 90°	•	•	•	•
<b>607-OV</b>	12 →	Oval Vertical Angle 45°	•	•	•	•
<b>608-OV</b>	12 →	Oval Flat Angle 45°	•	•	•	•
<b>610-OV</b>	12 →	Round to Oval Boot 90°	•	•	•	•
<b>610T-OV</b>	12 →	Tapered Round to Oval Boot 90°	6" round to 7" oval		•	-
<b>611-OV</b>	12 →	Oval to Round Boot 90°	•	•	•	•
<b>612-OV</b>	12 →	Round to Oval End Boot	•	•	•	•
<b>612T-OV</b>	12 →	Tapered Round to Oval End Boot	6" round to 7" oval		•	-
<b>613-OV</b>	12 →	Round to Oval Straight Boot	•	•	•	•
<b>613T-OV</b>	12 →	Tapered Round to Oval Striaight Boot	6" round to 7" oval		•	-
<b>615</b>	12 →	Oval to Oval Reverse Boot	-	•	•	-
<b>620-OV</b>		Oval Stackhead with ears				
	pcs →	4 x 12	-	•	-	-
	pcs →	6 x 10	•	•	•	-
	pcs →	6 x 12	-	•	•	•
	pcs →	6 x 14	-	-	-	•
<b>622-OV</b>		Double Stackhead w/ ears				
	pcs →	6 x 10	-	•	•	-
	pcs →	6 x 12	-	•	•	-
	pcs →	6 x 14	-	-	-	•
<b>625-OV</b>		Oval Adapter not crimped				
	pcs →	3-1/4 x 10	-	•	-	-
	pcs →	3-1/4 x 12	-	•	•	-
	pcs →	4 x 10	-	•	•	-
<b>630-OV</b>		Oval Box 90°				
	pcs →	4 x 10	•	•	•	-
	pcs →	4 x 12	-	•	•	-
<b>635-OV</b>		Oval Box 45°				
	pcs →	2.25 x 12	-	•	-	-
	pcs →	4 x 10	-	•	•	-
	pcs →	4 x 12	-	•	•	-
<b>640-OV</b>	pcs →	Oval Starting Collar Not Crimped	•	•	•	•

**Capacities of branch ducts for residential application at recommended maximum velocity of 600 fpm.**

Branch Duct	Wrap	Area Sq.In.	CFM
5" Round	15.7"	19.6 in <sup>2</sup>	82
6" Round	18.9"	28.3 in <sup>2</sup>	118
7" Round	22.0"	38.5 in <sup>2</sup>	160
8" Round	25.1"	50.3 in <sup>2</sup>	210
5" Oval	15.7"	17.2 in <sup>2</sup>	72
6" Oval	18.9"	22.3 in <sup>2</sup>	93
7" Oval	22.0"	27.4 in <sup>2</sup>	114
8" Oval	25.1"	32.5 in <sup>2</sup>	136
2.25 x 10 Stack	24.5"	22.5 in <sup>2</sup>	94
3.25 x 10 Stack	26.5"	32.5 in <sup>2</sup>	135
3.25 x 12 Stack	30.5"	39.0 in <sup>2</sup>	162
3.25 x 14 Stack	34.5"	45.5 in <sup>2</sup>	190

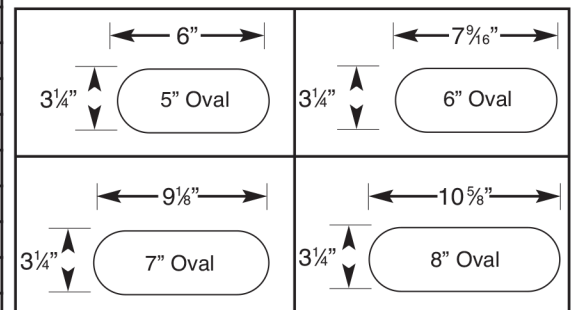

Nominal duct sizes conform to industry standards.

Specifications are subject to change without notice.

• = Available item. Contact distributor for pricing.