

KOHLER

72" x 42" drop-in whirlpool bath K-1418-JHC

Features

- Eight Flexjet® hydromassage jets can be individually adjusted for water flow and direction.
- Built-in heater.
- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath.
- Spacious design accommodates up to two bathers.
- Integral lumbar support.
- Multiple pump location options give you more choices for installation and access.
- Coordinates with other products in the Memoirs collection.

Material

Acrylic.

Technology

Whirlpool jets recirculate water, providing targeted relief for the bather.

Installation

- Drop-in.
- Rear center drain.

Required Products/Accessories

K-9698 Flexjet® Whirlpool Trim Kit

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable


K-24916 Wireless Music Kit

K-7161-AF 1-1/2" adjustable pop-up drain above- or through- Color tiles intended for reference only.

Included Components

Additional Components:

40" (1016 mm) cable



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

KOHLER® Hydrotherapy Components Five-Year Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes


Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune







72" x 42" drop-in whirlpool bath **K-1418-JHC**

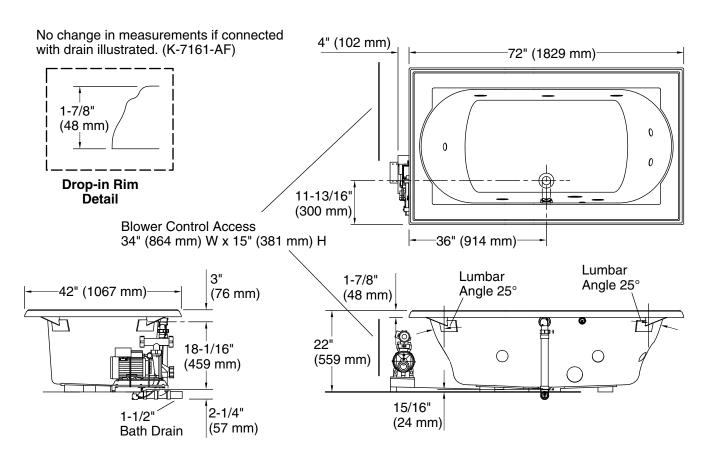

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in

Basin area, bottom: 48" x 27" (1219 mm x 686 mm) Basin area, top: 60" x 30" (1524 mm x 762 mm)

Weight: 135 lbs (61.2 kg)
Minimum floor load: 45 lbs/ft² (219.7 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 94 gal (355.8 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x

1029 mm)


Electrical component Pump: 120 V, 7 A, 60 Hz rating: Heater: 120 V, 12 A, 60 Hz

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



9-16-2022 21:53 - US/CA

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com.

