

### Features

- Two-function pull-down sprayhead allows you to switch from aerated stream to Sweep™ spray
- Sweep™ spray creates a wide, forceful blade of water for superior cleaning
- DockNetik™ secure docking system locks sprayhead into place when not in use
- ProMotion™ technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- High-arch spout with 360° spout rotation offers superior clearance for filling pots and cleaning
- Single-handle operation facilitates flow and temperature control
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

### Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Single- or three-hole installation (escutcheon included)

### Adapters, Rough-in and Extension Kits

1012715

Range: 1-3/8" (35 mm) -  
3-3/8" (86 mm)



ADA CSA B651

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)


ADA

ICC/ANSI A117.1

CSA B651

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

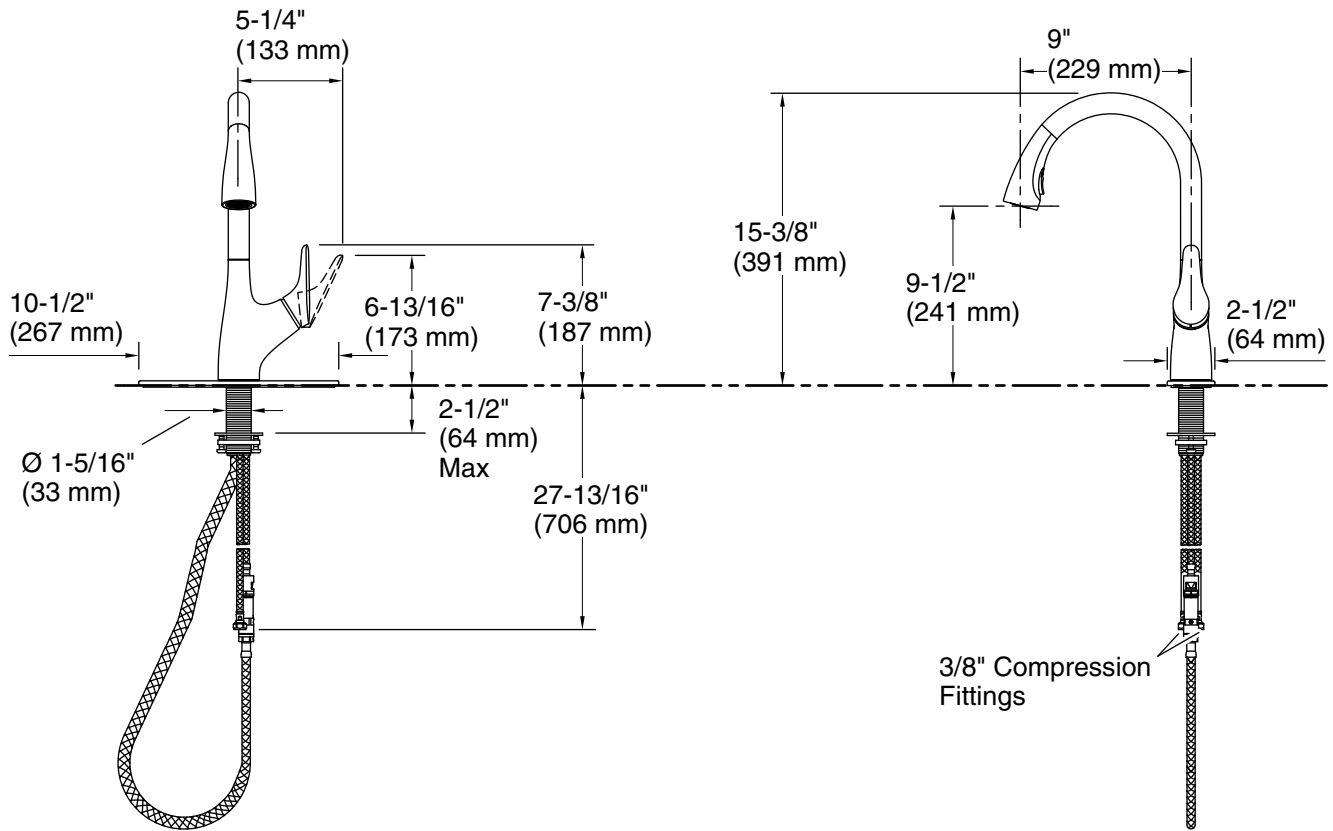

### Technical Information

All product dimensions are nominal.

Drain included: No

### Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.