



Lead Free Brass Ball Valve IPS

Features

Two-Piece Body

Full Port

Blowout-Proof Stem

PTFE Seats

Lead Free & Dezincification Resistant Material

IAPMO Listed to cUPC, NSF/ANSI 61& NSF/ANSI 372


UL/FM Listed

600 PSI WOG

Size : 1/2" – 2"



Materials

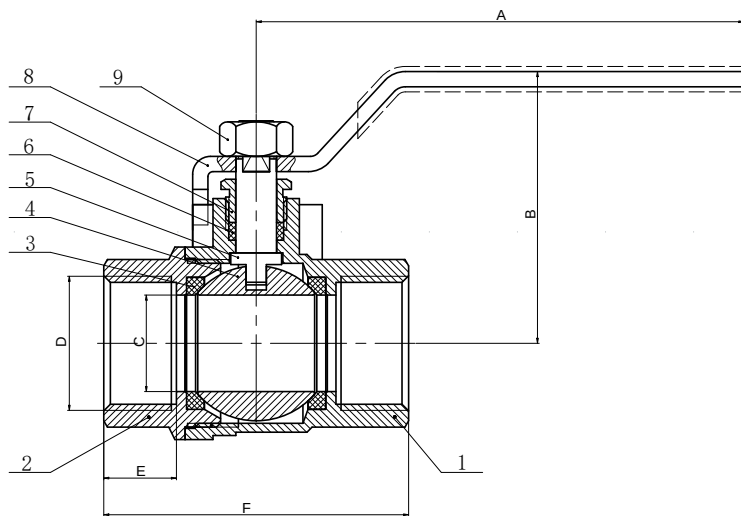

Item	Part Name	Material	PCS
1	Body	C46500 LF Brass	1
2	End Cap	C46500 LF Brass	1
3	Ball Seat	PTFE	2
4	Ball	SS304	1
5	Stem	Brass	1
6	Packing Gland	PTFE	1
7	Packing Nut	Brass	1
8	Lever Handle	Steel	1
9	Nut	Steel	1

Dimension

Product#	Size	A		B		C Ø		D		E		F	
	In.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
4PRO12LFIPSBV	1/2"	3.54	90	1.81	46	0.58	14.8	1/2" NPT	12.7	0.52	13.2	2.05	52
4PRO34LFIPSBV	3/4"	3.78	96	2.09	53	0.75	19	3/4" NPT	19.1	0.56	14.3	2.36	60
4PRO1LFIPSBV	1"	4.53	115	2.81	71.5	0.94	24	1" NPT	25.5	0.63	16	2.76	70
4PRO114LFIPSBV	1-1/4"	4.53	115	3.06	77.7	1.26	32	1-1/4" NPT	31.8	0.71	18	3.31	84
4PRO112LFIPSBV	1-1/2"	5.51	140	3.31	84	1.57	40	1-1/2" NPT	38.1	0.72	18.2	3.66	93
4PRO2LFIPSBV	2"	5.51	140	3.60	91.5	1.97	50	2" NPT	50.8	0.75	19	4.18	106.2