

### Features

- Water-saving 1.0 gpf (3.8 lpf) flush valve uses 22% less water than 1.28 gpf (4.8 lpf) flush valves
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap provides protection against vandalism
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Powered by 1.5V AA lithium batteries
- Patented piston technology for superior flush volume accuracy

### Material

- Brass construction with durable Polished Chrome finish

### Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation

### Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection

### Recommended Products/Accessories

- 1421939 Flushometer Arm Extension Kit
- 1509698 Pressure Gauge Kit, 1/8"

### Optional Products/Accessories

- GP1118986 Flushometer Extension Kit
- K-10313 Flushometer 12" rough-in kit



### Codes/Standards

ASME A112.18.1/CSA B125.1  
 ASSE 1037/ASME A112.1037/CSA B125.37  
 EPA WaterSense®  
 ADA  
 ICC/ANSI A117.1  
 CSA B651  
 OBC

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

\*10-3/4" (273 mm) minimum with a  
 6" (152 mm) critical level above the fixture

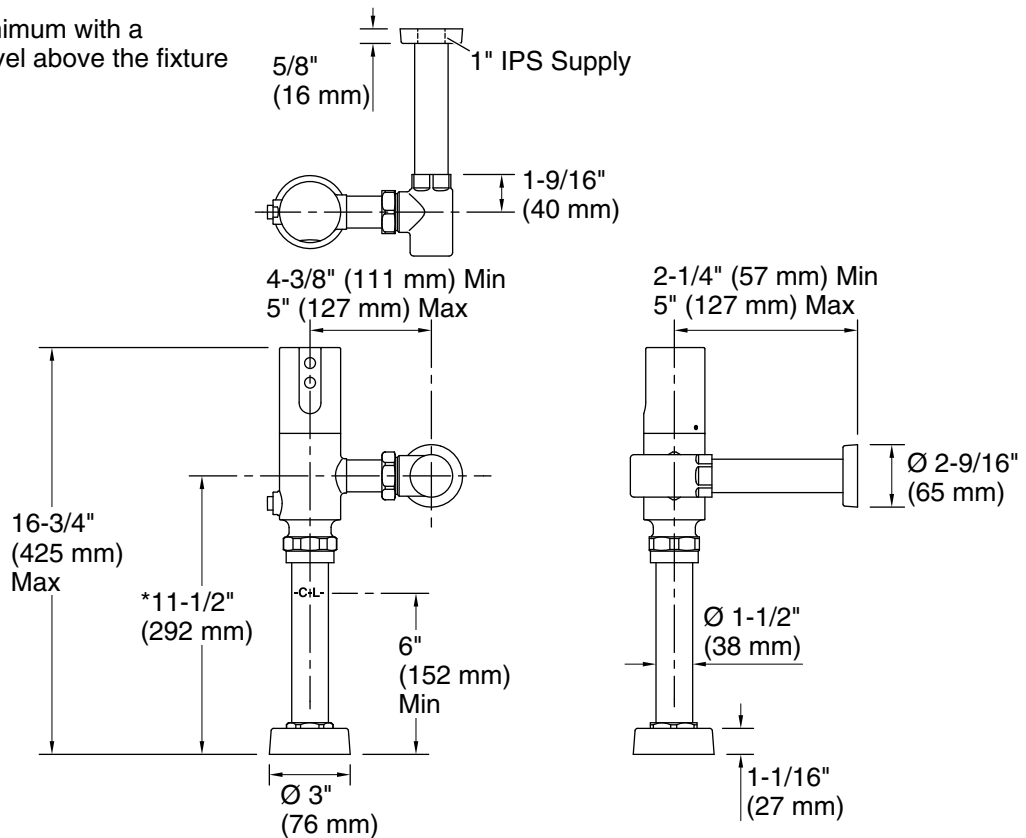

### Technical Information

All product dimensions are nominal.

Power source: Battery - DC, included

### Spout:

### Pressure/fixture Supply Requirements

Fixture pressure max (static): 80 psi (551.6 kPa)

Fixture pressure min (static): 35 psi (241.3 kPa)

Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.