


### TCHS2-8MMT

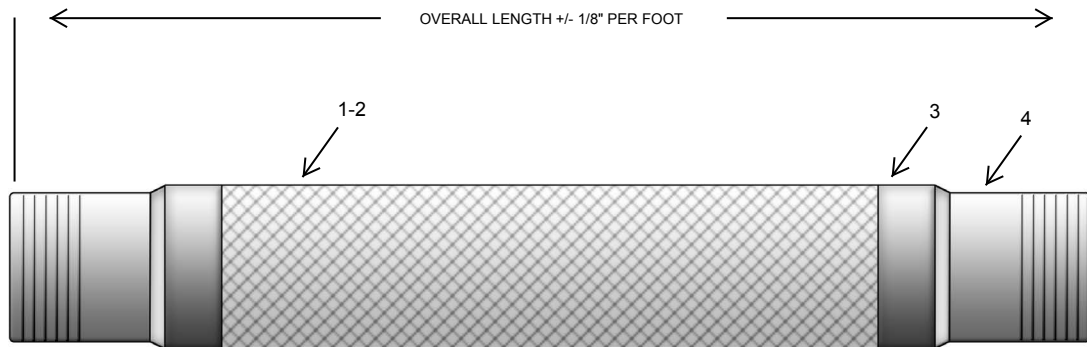

#### MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 2-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID COLLAR: STAINLESS STEEL
- #4 END FITTING: SCH. 80 CARBON STEEL MALE NPT

QTY	MODEL NUMBER	SIZE	OAL	MAX O.D.	WRK. PSIG	BURST PSI	@ TEMP.	LATERAL OFFSET
	TCHS2-050-8MMT-12	1/2"	12"	.97"	350	1750	70° F	1"
	TCHS2-075-8MMT-12	3/4"	12"	1.36"	350	1750	70° F	3/4"
	TCHS2-100-8MMT-12	1"	12"	1.65"	350	1750	70° F	3/4"
	TCHS2-125-8MMT-12	1 1/4"	12"	2.02"	350	1750	70° F	3/4"
	TCHS2-150-8MMT-12	1 1/2"	12"	2.37"	350	1750	70° F	1/2"
	TCHS2-200-8MMT-12	2"	12"	2.86"	350	1750	70° F	1/2"
	TCHS2-250-8MMT-12	2 1/2"	12"	3.57"	350	1750	70° F	1/16"
	TCHSM2-300-8MMT-12	3"	12"	3.81"	350	1750	70° F	1/16"

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: