

EP branch multi-port tees

Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Engineered Polymer
End type 2	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

Product information and application use

Engineered polymer (EP) branch multi-port tees are used in hot and cold domestic potable water distribution systems. The multi-port tees are available with 3/4" or 1" ProPEX® inlets and 1/2" ProPEX outlets.

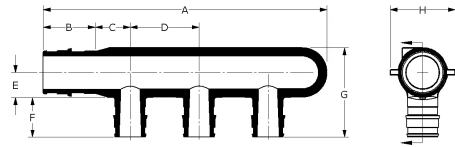

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]	End Type 1
3/4" EP Branch Multi-port Tee, 3 (1/2") outlets	Q2237550	4.43	0.955	0.625	1.25	0.48	0.719	1.639	1.22	0.1	ProPEX 3/4"
1" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2241050	6.691	1.191	0.775	1.25	0.6	0.719	1.879	1.48	0.17	ProPEX 1"
3/4" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2247550	5.73	0.955	0.625	1.25	0.48	0.719	1.639	1.22	0.13	ProPEX 3/4"
1" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2261050	9.251	1.191	0.625	1.25	0.57	0.719	2.009	1.441	0.25	ProPEX 1"
3/4" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2267550	8.902	0.955	0.625	1.25	0.457	0.719	1.624	1.18	0.18	ProPEX 3/4"

Installation

For a mounting bracket, use any product designed to mount 1" copper pipe for the 3/4" multi-port tee or 1 1/4" copper pipe for the 1" multi-port tee. For more information, refer to the Uponor Piping Systems Installation Guide.

Related applications

PEX-a Plumbing Systems

Codes

UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC

Standards

ASTM E814|ULC S115|ASTM F877|ASTM F1960|CSA B137.5|ULC S102.2|ASTM E119|UL 263|NSF-61|ULC S101|NSF-14

Listings

IAPMO-ES|HUD MR 1269|ICC-ES-PMG|cNSFus-pw|UL|U.P.Code|cQA|us P321

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517