

### Features

- Includes tamper resistant locking nut to prevent accidental misadjustment.
- Built-in check valves prevent migration of hot water to cold and cold water to hot water piping.
- Provided with cap for three port application.
- Integral strainer with 40 mesh stainless steel screens to filter.

### Material

- Lead Free\* Brass body construction.

### Installation

- Installs easily between the stop valves and faucet.




### Codes/Standards

ASSE 1070  
NSF 61  
NSF 372

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

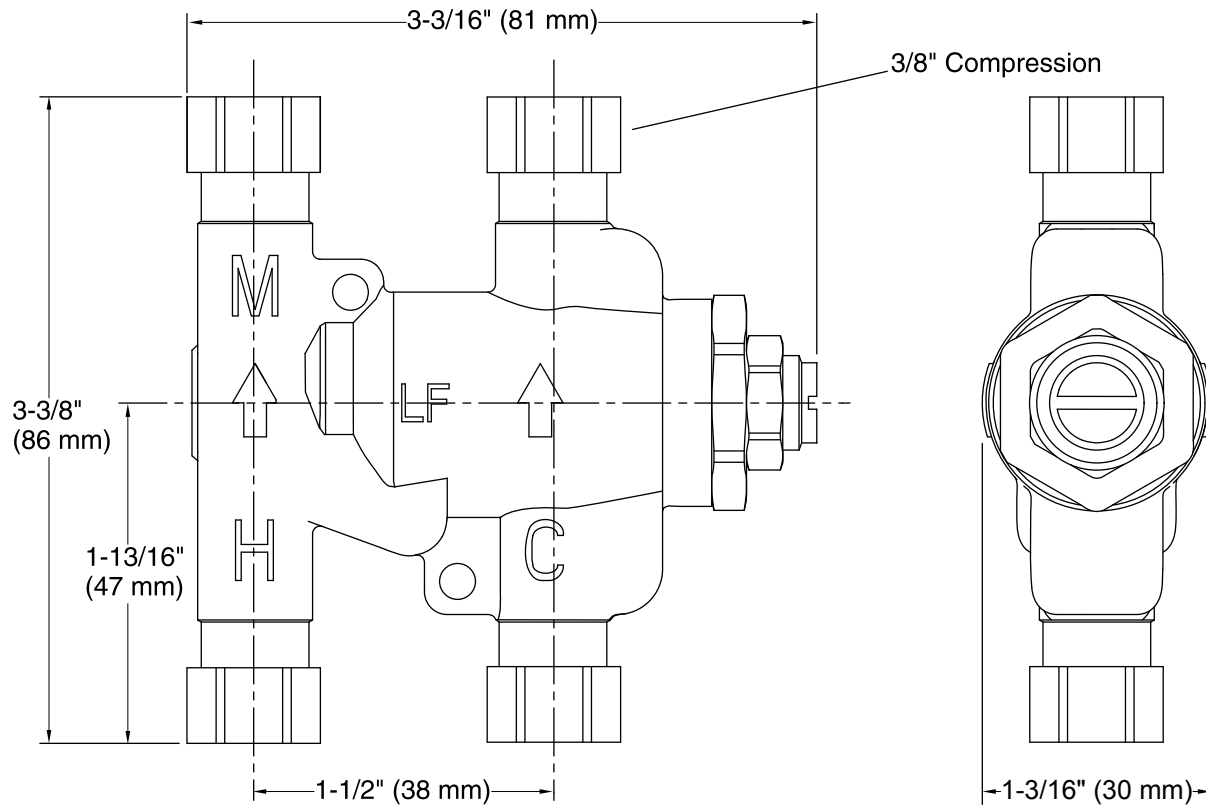

### Technical Information

All product dimensions are nominal.

#### Shower Valve:

Flow rate - Max: 2.25 gal/min (8.5 l/min)

Flow rate - Min: 0.5 gal/min (1.9 l/min)

Valve body: Cast Brass

### Notes

Install this product according to the installation guide.

For use with showerheads or handsprays rated at 0.5 gal/min (1.9 l/min) or higher.