


### Hot Water Coil Specifications

Model No.		V2430	V3036	
WC model		HW-V2430	HW-V3036	
No. Rows		4		
Tube diameter	inch [mm]	1/2 [12.7]		
Tube material		Cu		
Fin density	inch <sup>-1</sup> [mm <sup>-1</sup> ]	10 [0.40]		
Fin material		Al		
Face Area	inch <sup>2</sup> [m <sup>2</sup> ]	199 [0.128]	259 [0.167]	
No. Circuits		3		
Connections, ODF		7/8 [22.2]		
Weight	Net	Lbs. [kg]	8 [3.6]	11 [5.0]
	Ship	Lbs. [kg]	12 [5.4]	15 [6.8]
Coil Dimensions	W	inch [mm]	17.38 [442]	21.38 [543]
	D	inch [mm]	4.50 [114]	4.50 [114]
	H	inch [mm]	15.86 [403]	15.86 [403]

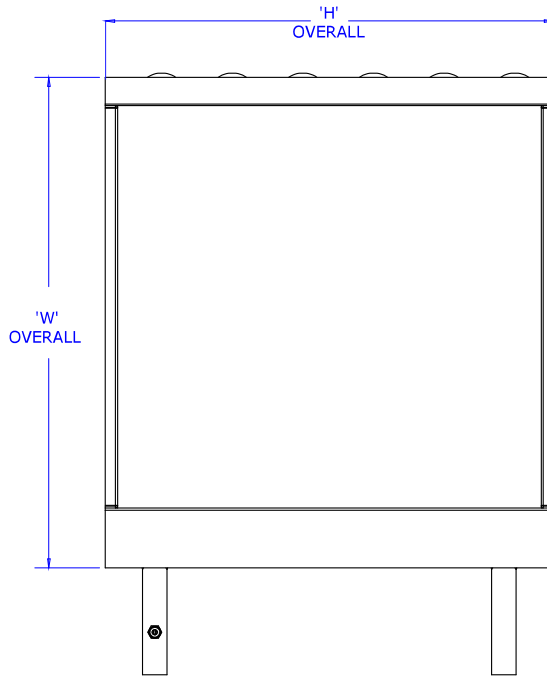

Air Flow Rate		Hot Water Coil Model			
CFM	(m <sup>3</sup> /h)	HW-V2430		HW-V3036	
400	(680)	0.11	(26)	0.08	(20)
500	(850)	0.16	(39)	0.10	(25)
625	(1060)	0.23	(58)	0.15	(36)
750	(1270)	0.32	(80)	0.20	(50)
875	(1490)	-	0.27	(66)	
1000	(1700)	-	0.34	(83)	

**Note:** Evaluated at 70°F db (21°C)

